


CILINDRO SEMPLICE EFFETTO TUFFANTE " TIPO STANDARD "

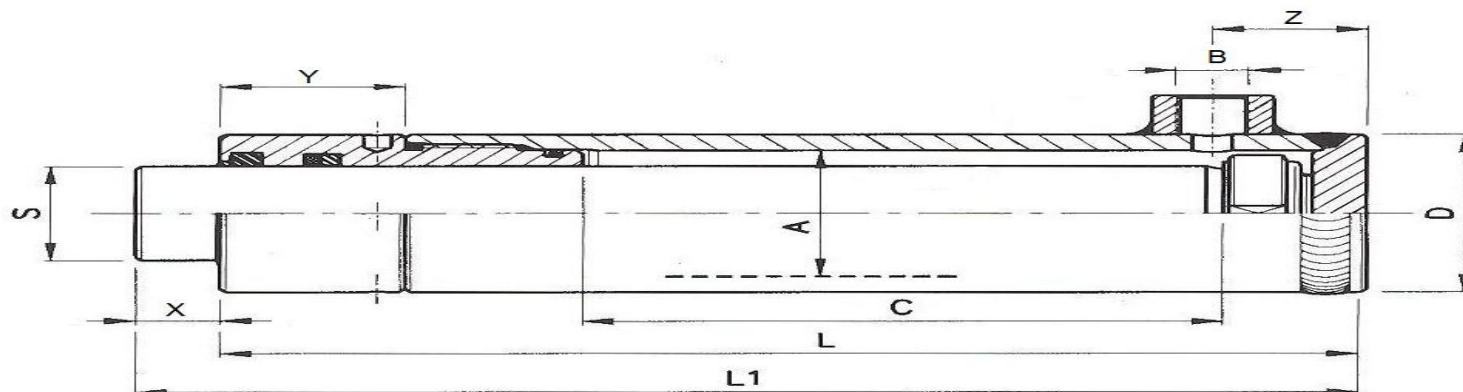

CARATTERISTICHE TECNICHE:

STELO CROMATO : Acciaio C45 - UNI 5332

PRESSIONE DI PICCO : max. 200 bar

TUBO : "Lucido" ISO H9 - DIN 2393 - ST 52.3

PRESSIONE CONTINUA : max. 140 bar

TEMPERATURA : da - 25° C a + 80° C

S Stelo	A Alesaggio	D Diam. Est.	C Corsa	ARTICOLO	L	L1	B Borchia	X	Y	Z
25	35	45	200	TU2535200	290	305	1/4"	15	33	28
			250	TU2535250	340	355				
			300	TU2535300	390	405				
			400	TU2535400	490	505				
30	40	50	200	TU3040200	290	305	3/8"	15	33	28
			250	TU3040250	340	355				
			300	TU3040300	390	405				
			350	TU3040350	440	455				
			400	TU3040400	490	505				
			500	TU3040500	590	605				
40	50	60	200	TU4050200	298	313	3/8"	17	35	33
			300	TU4050300	398	413				
			350	TU4050350	448	463				
			400	TU4050400	498	513				
			450	TU4050450	548	563				
			500	TU4050500	598	613				

